

Raybestos 4-piston intermediate & superspeedway front package




hardware

hats

rotors

pads

calipers

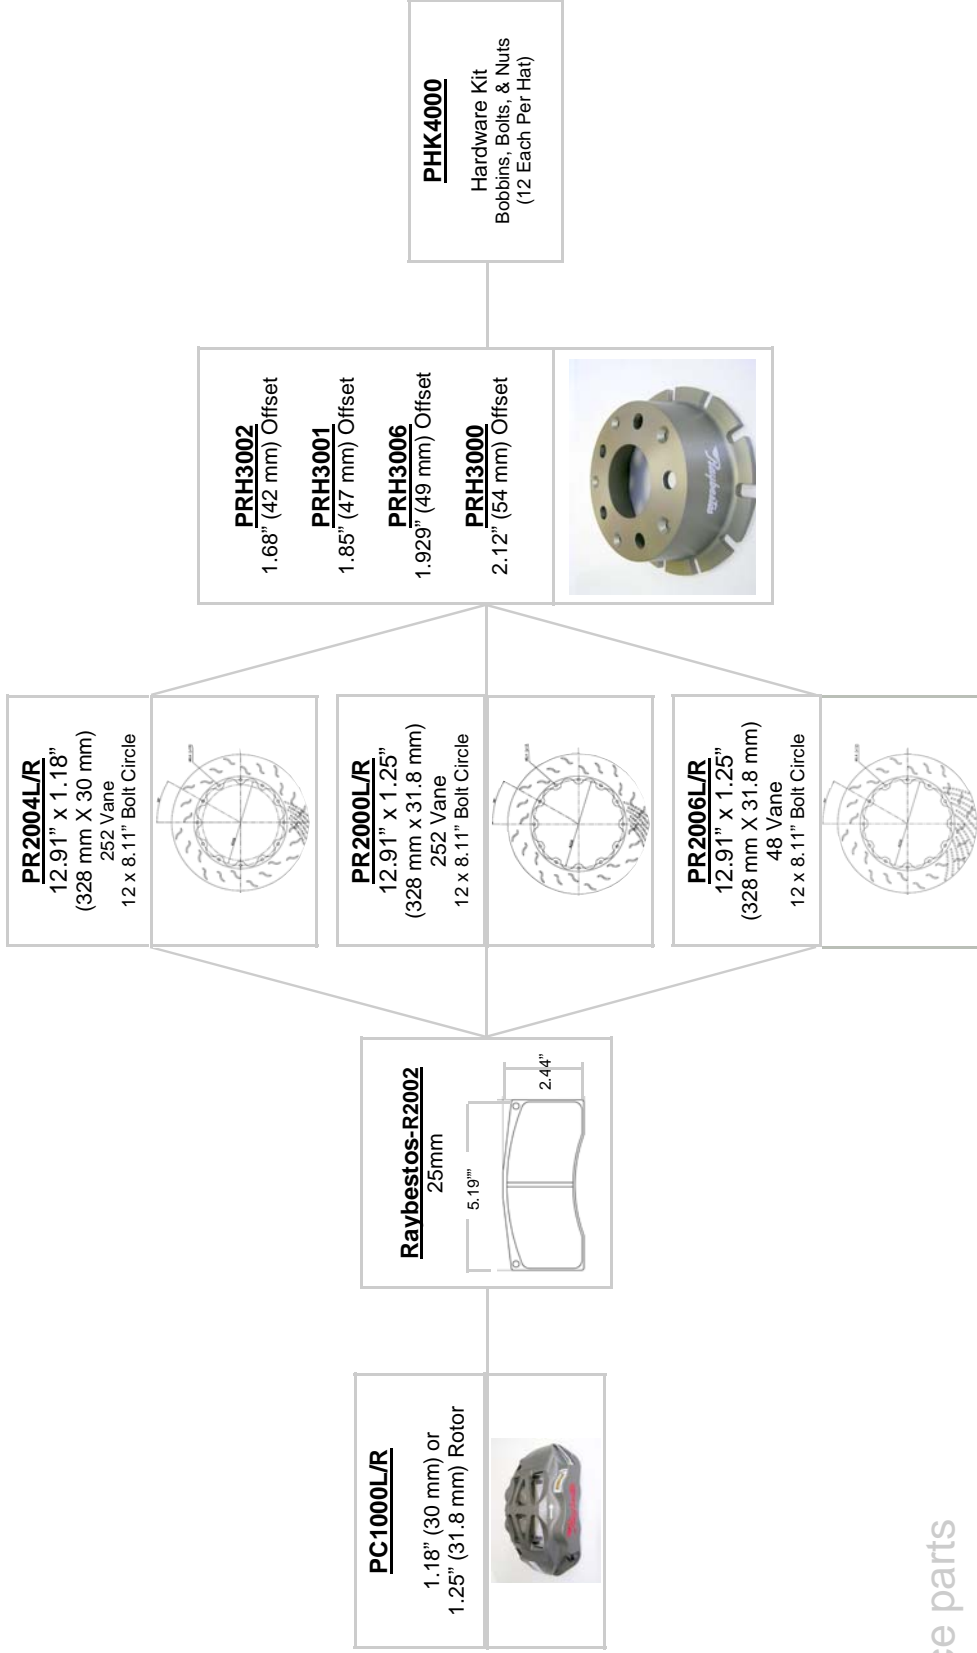

service parts

- 1.6" (41.3 mm) piston **PHK4014**
- 1.5" (38.1 mm) piston **PHK4013**
- Caliper seal kit **PHK4004**
- 180 mm bracket **PBC5000**

- bridge pipe left **PHK4020**
- bridge pipe right **PHK4021**
- bleed screw kit **PHK4005**

Brake Parts, Inc. (Raybestos)
T +1 (615) 896-6774
F +1 (615) 895-2901
E ron.sledge@affinagroup.com
Contact: Ron Sledge

Alcon USA (Technical Support)
T +1 (704) 799-2723
F +1 (704) 799-2287
E jthomas@alconusa.com
Contact: Jerry Thomas



information



Raybestos intermediate & superspeedway front package

options

- 1.18" (30 mm) and 1.25" (31.8 mm) rotor options.


features and benefits

- Web bridge design for superior stiffness and minimal lateral deflection; improves release characteristics.
- Rib protects bleed screws and bridge pipe during tire change.
- Superior pad retraction for minimal rotor drag.
- Premium, high temperature aluminum alloy monobloc.
- Standard 180 mm radial mount.
- Large pad area and volume; widely available pad shape.
- Ventilated piston inserts.
- O-ring sealed bleed screws prevents air ingress and fluid loss.
- Unique, bridge mounted pad retraction springs.
- Stainless steel wear plates and pad abutments.



specifications

Piston size	41.3/38.1 mm (1.625"/ 1.5")
Pad thickness	25 mm
High airflow rotors	
• 31.8 mm, 252 vane rotor	13.7 lbs. (6.23 kg)
• 31.8 mm, 48 vane rotor	16.5 lbs. (7.48 kg)
• 30 mm, 252 vane rotor	13 lbs. (5.9 kg)
PC1000L/R front caliper	6.25 lbs. (2.8 kg)
Bobbin drive hat	2.30 lbs. (1.04 kg)
Bobbin drive hardware (axle set)	1.21 lbs. (0.55 kg)

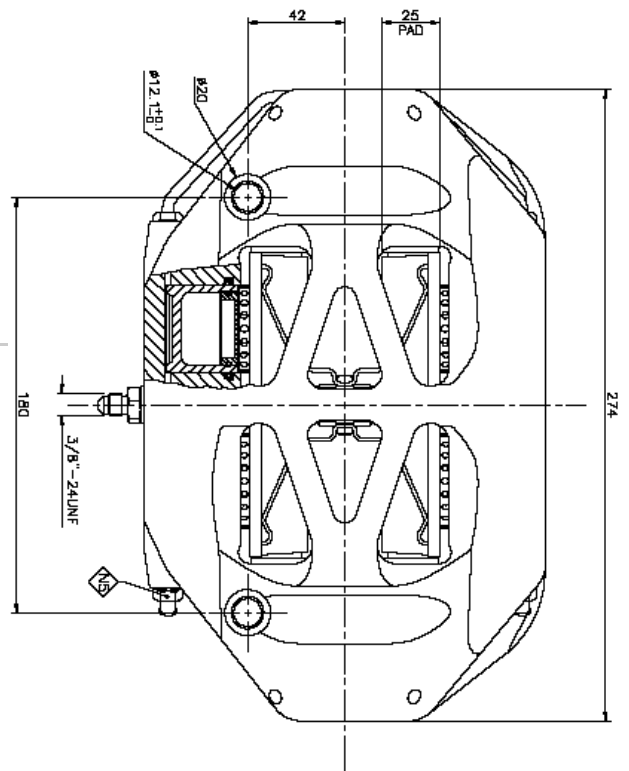

applications

NASCAR Nextel Cup, Busch Series and Craftsman Truck Series.